

HBL1K SERIES

AC/ DC Power Supply High Voltage Output: 1000 Watts



19in Rack mount options

General Specifications

Input Voltage	115 / 230vac (±15%) Selectable by internal link
Input Protection	Inrush current limiting Input Fuse
Isolation	Input - Output 4300vdc Input - Chassis 2250vdc Output - Chassis 500vdc
EMI	EN55022 class A
Switching Freq.	55KHz
Output voltage	See table
Output Power	1000 watts
Voltage adjustment	Customer specified
Redundancy Diode	Optional for N+1 Applications
Regulation	Line / Load : ±1% combined 10% to 100% load
Dynamic Response	5% voltage deviation for 10% to 50% load step with 1msec recovery
Output Ripple /Noise	Typically 1% pk-pk or 0.2% rms 20MHZ BW
Output Protection	Over voltage protection Current limiting (Constant Current) Short circuit protection Thermal protection
Efficiency	Model dependent typically 85%
Operating temp.	0° C to +50°C at 100% load Derate 2.5% per °C to 65°C
Cooling	Conduction / Convection cooled
Environmental protection	Basic ruggedizing. Extended ruggedizing and conformal coating available as an option
MTBF	Typically 160, 000 hrs
Indicators	Optional LED
Connector	Input terminal block. Output terminal block or threaded studs Other options on request
Dimensions	356 x 210 x 64 mm (F6)
Weight	3.2kg

Features

- Designed for high voltage output 24 ~ 125vdc
- Conduction / Convection cooled- No fans
- Rugged design for industrial applications
- Fully isolated input – output 4300VDC
- Over voltage protection & Overload protection
- Overload and short circuit protection
- MTBF > 160,000hrs
- Specials input / output combinations on request.
- Suitable for battery charging applications - Option
- N+1 Redundancy –option
- Output DC Fail alarm -option
- Suitable for Battery Charging applications

Description

The **HB1K** AC/DC Power Supply is designed for high voltage applications up to 125VDC.

This rugged, industrial quality power supply uses field proven topology. It is a mature design with an excellent track record in numerous applications.

Cooling is via the base plate (conduction) and or convection cooling, with no fans, making it suitable for harsh environmental applications.

An optional built-in redundancy diode allows parallel connection to achieve higher output power or N+1 redundancy, with output DC Fail alarm.





This chassis-mount design is optimized for low component count and high efficiency. The use of components with established reliability results in high MTBF.

Options

Output Voltage	Special voltage outputs
Terminals	Customer specified connectors
N+1 Redundancy	Output redundancy diode & Alarm
Ruggedizing	Extended ruggedizing and conformal coating available.
Remote Control	Remote ON / OFF

Model	Input V	Outputs V A	Power W
HBL1K-24FT	115/230VAC	24V 38A	900W
HBL1K-28FT	115/230VAC	28V 32A	900W
HBL1K-36FT	115/230VAC	36V 25A	900W
HBL1K-48FT	115/230VAC	48V 21A	1000W
HBL1K-56FT	115/230VAC	56V 18A	1000W
HBL1K-110FT	115/230VAC	110V 9A	1000W
HBL1K-125FT	115/230VAC	125V 8A	1000W

- Other voltage options available from 24 ~ 125V.

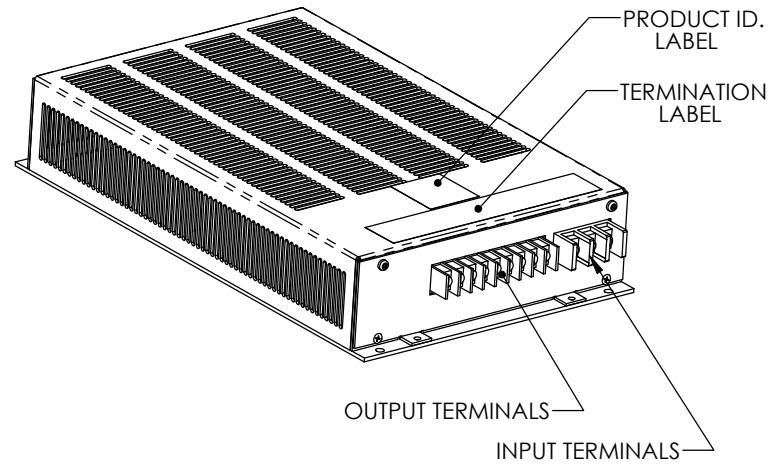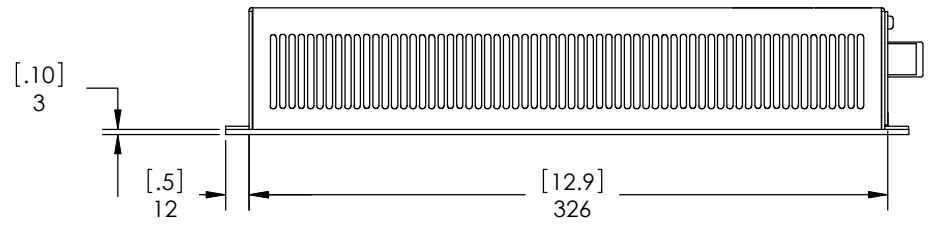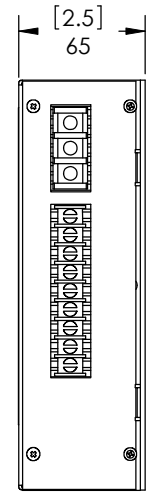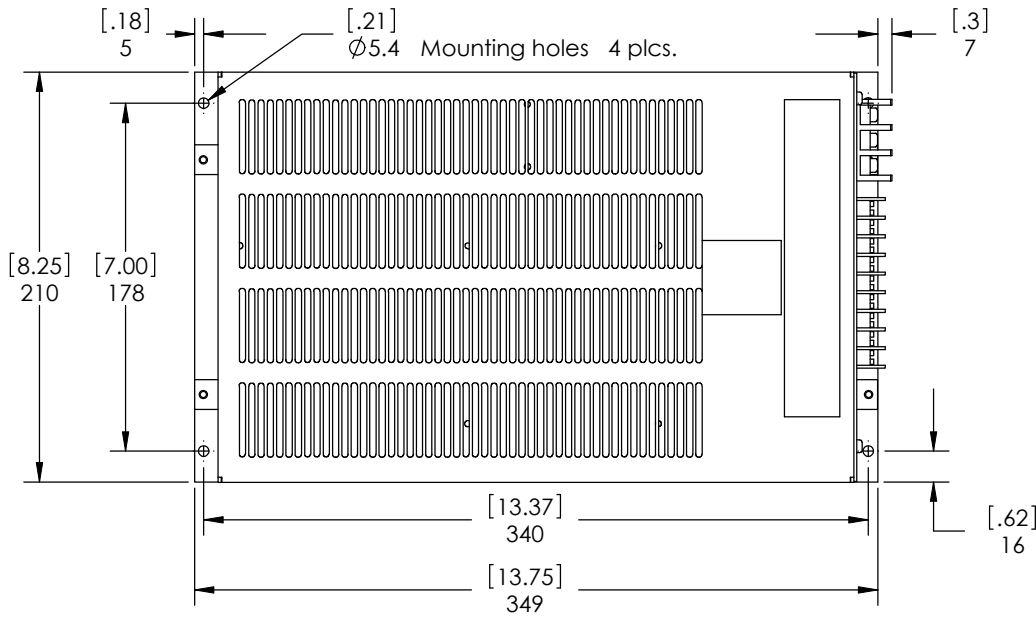

DIMENSIONS ARE IN MILLIMETERS
 [INCHES] TOLERANCES ON
 DECIMALS: XXX ± 0.2mm
 XX ± 0.3mm
 ANGLES: ± 2°
 FRACTIONS: ± 0.4mm
 UNLESS OTHERWISE STATED

Title: OUTLINE DRAWING
 F6 PACKAGE

